

ControlSpace® ESP-00 AES3 8-channel output card




Product Overview

The Bose® AES3 8-channel output card allows card-frame ControlSpace® engineered sound processors to send up to 8 channels to compatible AES3-equipped devices such as Bose PowerMatch® configurable professional power amplifiers, other processors and mixing consoles.

Technical Specifications

Digital Audio	
Channels	Eight (8) output
Format	AES3, 2 ch.
Sample Rate / Bit Depth	48 kHz / 24 bit
Connectors	Four (4) 5.08 mm Euroblock, 3 pin
Indicators	
Signal	Green (-60 to -20 dBFS), Yellow (-20 to -2 dBFS), Red (-2 to 0 dBFS) LED 1: AES3 output channels 1-2 (top LED) LED 2: AES3 output channels 3-4 LED 3: AES3 output channels 5-6 LED 4: AES3 output channels 7-8 (bottom LED)
Software Application	
ControlSpace® Designer™ Software	v2.0 or later
General	
Product Code	41766
Compatible With	ControlSpace ESP-00 II engineered sound processor ControlSpace ESP-00 engineered sound processor ControlSpace ESP-88 engineered sound processor (built 2008 or later)
Box Contents	(1) expansion card, (4) Euroblock connectors, (1) installation guide
Slot Requirement	One space
Routing Slot Allocation	1

Connector Panel

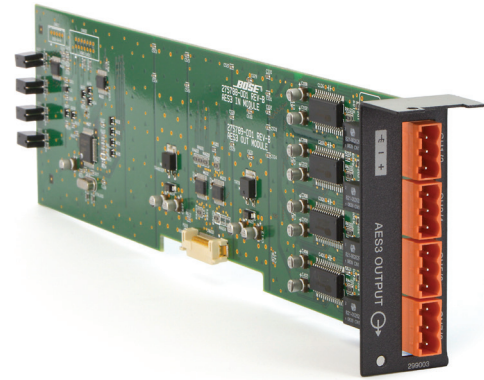

Key Features

- 8-channel AES3 output
- LED indicators for audio signal

Applications

The ControlSpace ESP-00 AES3 output card network card enables card-frame Bose engineered sound processors to send 8 channels of AES3 digital audio to other AES3 devices such as amplifiers and DSPs.

Designed for a wide range of applications, including:

- Performing arts venues
- Hotels and conferencing facilities
- Religious and worship facilities
- Health clubs
- Retail and shopping centers
- Sports venues
- Schools and universities

All information subject to change without notice.
© 2014 Bose Corporation
All trademarks are those of their respective owners.